



HAL
open science

MOF/chitosan composites for the capture of gaseous iodine

Nisrine Hammi, Nelly Couzon, Alla Abramova, Christophe Volkringer,
Thierry Loiseau, Sebastien Royer, Jeremy Dhainaut

► **To cite this version:**

Nisrine Hammi, Nelly Couzon, Alla Abramova, Christophe Volkringer, Thierry Loiseau, et al..
MOF/chitosan composites for the capture of gaseous iodine. SCF'23, Jun 2023, Nantes, France.
hal-04303278

HAL Id: hal-04303278

<https://hal.univ-lille.fr/hal-04303278>

Submitted on 23 Nov 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

MOF/CHITOSAN COMPOSITES FOR THE CAPTURE OF GASEOUS IODINE

<<One blank>>

Nisrine HAMMI^{1,2}, Nelly COUZON¹, Alla ABRAMOVA¹, Christophe VOLKRINGER¹, Thierry LOISEAU¹, Sébastien ROYER¹, Jérémy DHAINAUT¹

<<One blank>>

¹ Univ. Lille, CNRS, Centrale Lille, Univ. Artois, UMR 8181 - UCCS - Unité de Catalyse et Chimie du Solide, F-59000 Lille, France

² Univ. Lille, CNRS, INRA, Centrale Lille, Univ. Artois, FR 2638 - IMEC - Institut Michel-Eugène Chevreul, 59000 Lille, France. jeremy.dhainaut@univ-lille.fr, <https://uccs.univ-lille.fr/index.php/fr/>

<<One blank>>

<<One blank>>

<<One blank>>

Keywords: metal-organic frameworks; chitosan; beads; films; composites; I₂ capture

<<One blank>>

<<One blank>>

Summary: Metal-organic frameworks (MOF) is an emerging class of crystalline and porous materials. Their structure results from the combination of metal clusters (or ions) with multitopic organic linkers. By changing the metal or the linker, or by adding organic functionalities to the linker, the physicochemical properties of the MOF can be tailored for specific applications. For instance, iodine-131 is a major fission by-product which can increase the incidence of thyroid cancers. Following a nuclear meltdown, venting is conducted to avoid overpressurization. The vented steam, containing radionuclides such as ¹³¹I₂, passes through a filtered containment venting system to capture the contaminants. Typically, a fixed bed of silver-doped ZSM-5 zeolite is used. However, several limitations remain due to the small pore aperture of the zeolite (0.55 nm), hardly accommodating bulky iodine derivatives, and the competitive adsorption of contaminants (mainly CO). Hence adsorbents more specific towards I₂ and its derivatives, presenting larger pores and/or higher iodine capture capacity, remain desired.

In particular, the UiO-66 MOF presents a good stability against water, a high adsorption capacity, and larger pore sizes (0.8 to 1.1 nm). By adding amino moieties on the terephthalate linker, one can obtain UiO-66-NH₂, an adsorbent with high binding energy towards electro-acceptor species such as I₂. Recently, our group applied severe nuclear accidental conditions to this MOF, previously shaped as binderless granules, showing high retention of ¹³¹I₂ and preserved physicochemical properties.^[1] In a subsequent step, we studied the preparation of UiO-66-NH₂-based extrudates and granules with improved mechanical properties by adding biopolymers. With lesser than 5 wt.% of chitosan, the textural properties of the resulting composites are barely affected - in line with the chitosan loading, and as-prepared materials present both high adsorption capacity towards iodine (see Figure 1.A-B) and a significantly improved mechanical resistance.^[2] Still, shifting from a fixed bed of powder to a fixed bed of granules has consequences over the adsorption kinetics, with gaseous I₂ diffusing in-between the granules. Hence, in a next step, we prepared composite films with up to 60 wt.% of UiO-66-NH₂ MOF (Figure 1.C). By doing so, the adsorption equilibrium was reached within 24 h as per the MOF powder. Moreover, the total quantity of I₂ adsorbed correspond to the loading of the MOF, meaning that up to 40 wt.% of chitosan, the porosity of the MOF remains fully accessible. The main results and perspectives of these works will be discussed.

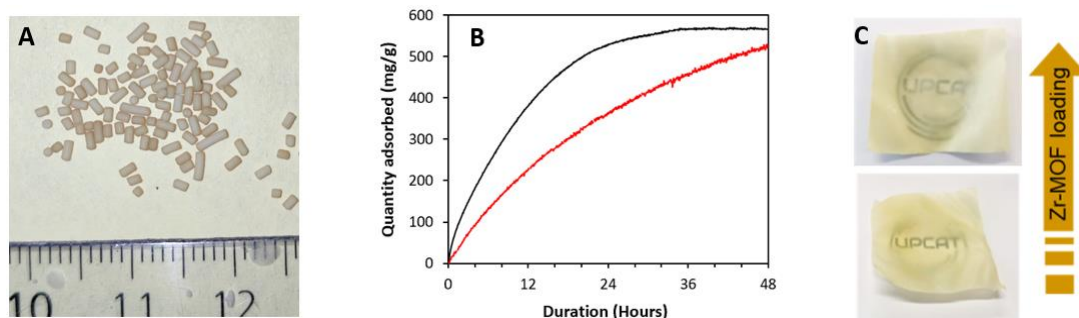


Fig. 1 UiO-66-NH₂@chitosan granules (A) and their relative iodine adsorption kinetic curve (B, red) compared to their powder counterpart (B, black). UiO-66-NH₂@chitosan films with various MOF loadings (B).

References:

- Leloire, M.; Dhainaut, J.; Devaux, P.; Leroy, O.; Desjonqueres, H.; Poirier, S.; Nerisson, P.; Cantrel, L.; Royer, S.; Loiseau, T.; Volkringer, C. *J. Hazard. Mater.* **2021**, *416*, 125890.
- Abramova, A.; Couzon, N.; Leloire, M.; Nerisson, P.; Cantrel, L.; Royer, S.; Loiseau, T.; Volkringer, C.; Dhainaut, J. *Appl. Mater. Interfaces* **2022**, *14*, 10669-10680.