



**HAL**  
open science

## Cellulose conversion to glycols over DUT-8(Ni) derived nickel-tungsten/carbons: selectivity tuning.

Joseph Boulos, Firat Goc, Noémie Perret, Franck Rataboul, Eric Marceau,  
Jeremy Dhainaut, Sebastien Royer

### ► To cite this version:

Joseph Boulos, Firat Goc, Noémie Perret, Franck Rataboul, Eric Marceau, et al.. Cellulose conversion to glycols over DUT-8(Ni) derived nickel-tungsten/carbons: selectivity tuning.. GECAT 2023, Jun 2023, Dunkerque, France. hal-04303346

**HAL Id: hal-04303346**

**<https://hal.univ-lille.fr/hal-04303346>**

Submitted on 23 Nov 2023

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Cellulose conversion to glycols over DUT-8(Ni) derived nickel-tungsten/carbons: selectivity tuning.

Joseph Boulos,<sup>1</sup> Firat Goc,<sup>2</sup> Noémie Perret,<sup>2</sup> Franck Rataboul,<sup>2</sup> Éric Marceau,<sup>1</sup> Jérémy Dhainaut,<sup>1</sup> Sébastien Royer<sup>1</sup>

<sup>1</sup> Univ. Lille, CNRS, Centrale Lille, Univ. Artois, UMR 8181 - UCCS - Unité de Catalyse et Chimie du Solide, F-59000 Lille, France

<sup>2</sup> Institute of Researches on Catalysis and Environment in Lyon, Université Claude Bernard Lyon, Avenue Albert Einstein, 69626 Villeurbanne, France

There have been various studies on the transformation of cellulose to low carbon polyols (C2,3), ethylene glycol (EG), propylene glycol (PG) and glycerol (Gly), which are prevailing intermediates in the manufacture of plastics, pharmaceuticals, food additives, and cosmetics, etc. Cellulose conversion to diols mainly involves 3 types of reactions: cellulose hydrolysis, retro-aldol condensation, and hydrogenation. For the formation of 1,2-PG, the sugar isomerization reaction is also involved.

Using activated carbon-supported tungsten carbide (W<sub>2</sub>C/AC) catalysts, Zhang *et al.* obtained an EG yield of 76 % starting from cellulose [1]. Besides being a cheap non-noble metal-derived phase, a noteworthy advantage of tungsten carbide over other tungsten species (oxides and metal) is the preferential formation of EG among other polyols due to its Pt-like catalytic behavior. Yang *et al.* prepared Ni-W/C nanofiber catalysts, *in situ* fabricated through the pyrolysis of Ni, W-containing metal-organic framework fibers. A large productivity varying from 15.3 to 70.8 mol<sub>EG</sub>.h<sup>-1</sup>.g<sub>W</sub><sup>-1</sup> was reported, which is two orders of magnitude higher than previously reported Ni-W-based catalysts [2]. Interestingly Sun *et al.* [3] showed the impact of the Sn phase and valence on the catalytic properties of bimetallic systems supported on activated carbon. When powder of metallic Sn was used with Ni/AC, a Ni-Sn alloy formed which promoted retro-aldol cleavage and hydrogenation, finally favoring EG production (58 %). When SnO was used, the catalyst promoted glucose isomerization, leading preferentially to PG (32 %). The above studies inspired our current work. A series of W and Ni-containing metal-organic frameworks were constructed by one-pot assembly of DUT-8(Ni) MOF precursors and Na<sub>2</sub>WO<sub>4</sub>·2H<sub>2</sub>O. A subsequent pyrolysis of the W@ DUT-8(Ni) materials at 700 °C under nitrogen produced nickel-tungsten/carbon catalysts. The following nomenclature was adopted for the resulting materials: NiW-I-x-C-N<sub>2</sub>; where x (nW/nNi) was set at 0.06, 0.12, 0.3, and 0.43, respectively. Figure 1 displays the catalytic results of the as-synthesized materials in the cellulose hydrogenolysis at 245 °C in a reaction time of 1 hour. Both materials with low (NiW-I-0.06-C-N<sub>2</sub>) and high (NiW-I-0.3-C-N<sub>2</sub>) W content were selective to EG (17 %). A remarkable yield switch to PG (36 %) was obtained at an average W loading (NiW-I-0.12-C-N<sub>2</sub>). The highest EG molar yield (25 %) was obtained over NiW-I-0.43-C-N<sub>2</sub>.

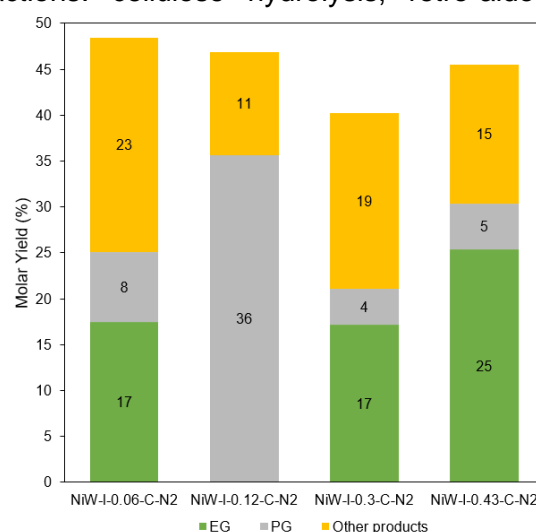


Figure 1. Products' molar yields over NiW catalysts having different tungsten loadings. Reaction conditions: 0.50 g cellulose, 0.15 g catalyst, 50 mL water, 60 bar H<sub>2</sub>, 1000 rpm, 245 °C, and 1 hour.

- [1] Y. Zhang, A. Wang, and T. Zhang, "A new 3D mesoporous carbon replicated from commercial silica as a catalyst support for direct conversion of cellulose into ethylene glycol," *Chem Commun*, vol. 46, no. 6, pp. 862–864, 2010, doi: 10.1039/B919182H.
- [2] Y. Yang *et al.*, "Versatile nickel-tungsten bimetallics/carbon nanofiber catalysts for direct conversion of cellulose to ethylene glycol," *Green Chem.*, vol. 18, no. 14, pp. 3949–3955, 2016, doi: 10.1039/C6GC00703A.
- [3] R. Sun *et al.*, "Selectivity-Switchable Conversion of Cellulose to Glycols over Ni-Sn Catalysts," *ACS Catal.*, vol. 6, no. 1, pp. 191–201, Jan. 2016, doi: 10.1021/acscatal.5b01807.