



HAL
open science

Application of Shaped UiO-66_NH₂ Metal-Organic Framework for Gaseous Iodine Capture

Maeva Leloire, Alla Abramova, Nelly Couzon, Sebastien Royer, Thierry Loiseau, Christophe Volkringer, Jeremy Dhainaut

► **To cite this version:**

Maeva Leloire, Alla Abramova, Nelly Couzon, Sebastien Royer, Thierry Loiseau, et al.. Application of Shaped UiO-66_NH₂ Metal-Organic Framework for Gaseous Iodine Capture. *Matériaux* 2022, Oct 2022, Lille, France. hal-04329256

HAL Id: hal-04329256

<https://hal.univ-lille.fr/hal-04329256v1>

Submitted on 7 Dec 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Application of Shaped UiO-66_NH₂ Metal-Organic Framework for Gaseous Iodine Capture

Maëva Leloire¹, Alla Abramova¹, Nelly Couzon¹, Sébastien Royer¹, Thierry Loiseau¹,
Christophe Volkringer¹, Jérémy Dhainaut¹

¹ Univ. Lille, CNRS, Centrale Lille, Univ. Artois, UMR 8181 - UCCS - Unité de Catalyse et Chimie du Solide, F-59000 Lille, France

Metal-organic frameworks (MOF) is an emerging class of crystalline and porous materials. Their structure results from the combination of metal clusters (or ions) with multitopic organic linkers. By changing the metal or the linker, or by adding organic functionalities to the linker, the physicochemical properties of the MOF can be tailored for specific applications. For instance, iodine-131 is a major fission by-product which can increase the incidence of thyroid cancers. Following a nuclear meltdown, venting is conducted to avoid overpressurization. The vented steam, containing radionuclides such as ¹³¹I₂, passes through a filtered containment venting system to capture the contaminants. Typically, a fixed bed of silver-doped ZSM-5 zeolite is used. However, several limitations remain due to the small pore aperture of the zeolite (0.55 nm), hardly accommodating bulky iodine derivatives, and the competitive adsorption of contaminants (mainly CO). Hence adsorbents more specific towards I₂ and its derivatives, presenting larger pores and/or higher iodine capture capacity, remain desired.

In particular, the UiO-66 MOF presents a good stability against water, a high adsorption capacity, and larger pore sizes (0.8 to 1.1 nm). By adding amino moieties on the terephthalate linker, one can obtain UiO-66_NH₂, an adsorbent with high binding energy towards electro-acceptors such as I₂ [1]. Recently, our group applied severe nuclear accidental conditions to this MOF, previously shaped as binderless granules, showing high retention of ¹³¹I₂ and preserved physicochemical properties [2]. In a subsequent step, we studied the preparation of UiO-66_NH₂-based extrudates and granules that present both high adsorption capacity towards iodine (see Figure 1) and a significantly improved mechanical resistance [3]. The main results and perspectives of this work will be discussed.

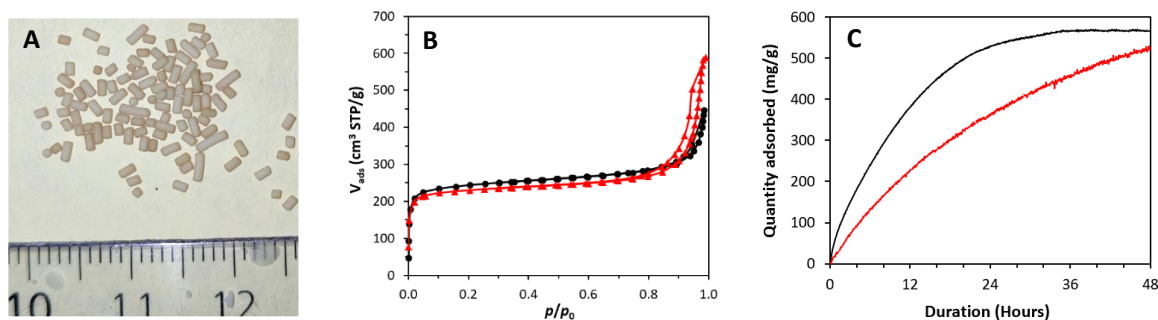


Figure 1: UiO-66_NH₂@chitosan granules (A) and their relative N₂ isotherms (B, red) and iodine adsorption kinetic curve (C, red) compared to their powder counterpart (black).

References:

- [1] W. Xie, D. Cui, S.R. Zhang, Y.H. Xu, D.L. Jiang, *Materials Horizons* 6 (2019) 1571.
- [2] M. Leloire, J. Dhainaut, P. Devaux, O. Leroy, H. Desjonqueres, S. Poirier, P. Nerisson, L. Cantrel, S. Royer, T. Loiseau, C. Volkringer, *Journal of Hazardous Materials* 416 (2021) 125890.
- [3] A. Abramova, N. Couzon, M. Leloire, P. Nerisson, L. Cantrel, S. Royer, T. Loiseau, C. Volkringer, J. Dhainaut, *ACS Applied Materials & Interfaces* 14 (2022) 10669.