

One-pot two-steps hybrid catalysis for 5-HMF valorization

A Lancien, E Heuson, R Wojcieszak, R Froidevaux

▶ To cite this version:

A Lancien, E Heuson, R Wojcieszak, R Froidevaux. One-pot two-steps hybrid catalysis for 5-HMF valorization. Catalysis:from understanding to applications, Jun 2019, Albi, France. hal-04562079

HAL Id: hal-04562079 https://hal.univ-lille.fr/hal-04562079v1

Submitted on 28 Apr 2024

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers. L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



One-pot two-steps hybrid catalysis for 5-HMF valorization


A. Lancien^a, E. Heuson^a, R. Wojcieszak^b, R. Froidevaux^a


^aInstitut Charles VIOLLETTE, Université Lille 1, F59655 Villeneuve d'Ascq, France ^bUniv. Lille, CNRS, Centrale Lille, ENSCL, Univ. Artois, UMR 8181 - UCCS - Unité de Catalyse et Chimie du Solide, F-59000 Lille, France



Introduction to hybrid catalysis

Enzymatically catalyzed reactions are highly selective and work very well under mild conditions (pH, buffer, temperature). However, higher scale extrapolation is limited to a certain class of stable and easily recyclable enzymes. Homogeneously and/or heterogeneously catalyzed reactions are often limited by the multiphasic nature of catalytic systems and/or variations in the distribution of active sites. For these reasons, the development of highly selective and efficient hybrid catalysts is especially needed, and it is now well admitted that disruptive innovation is highly desirable in process engineering, (bio)catalyst design and materials science. Optimal integration both types of catalyst is the key for efficient global implementation of sustainable processes in the hybrid catalysis field.

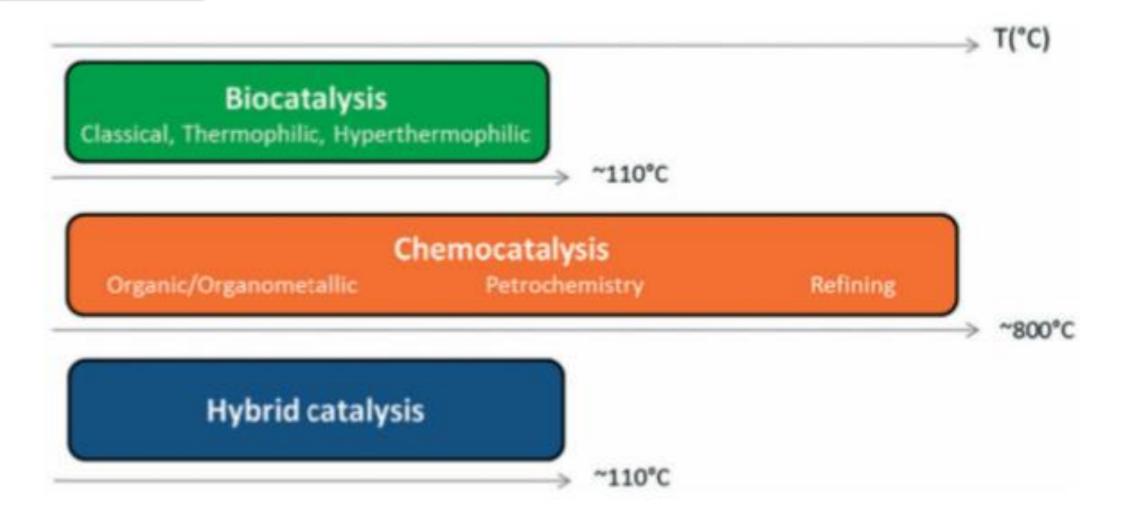

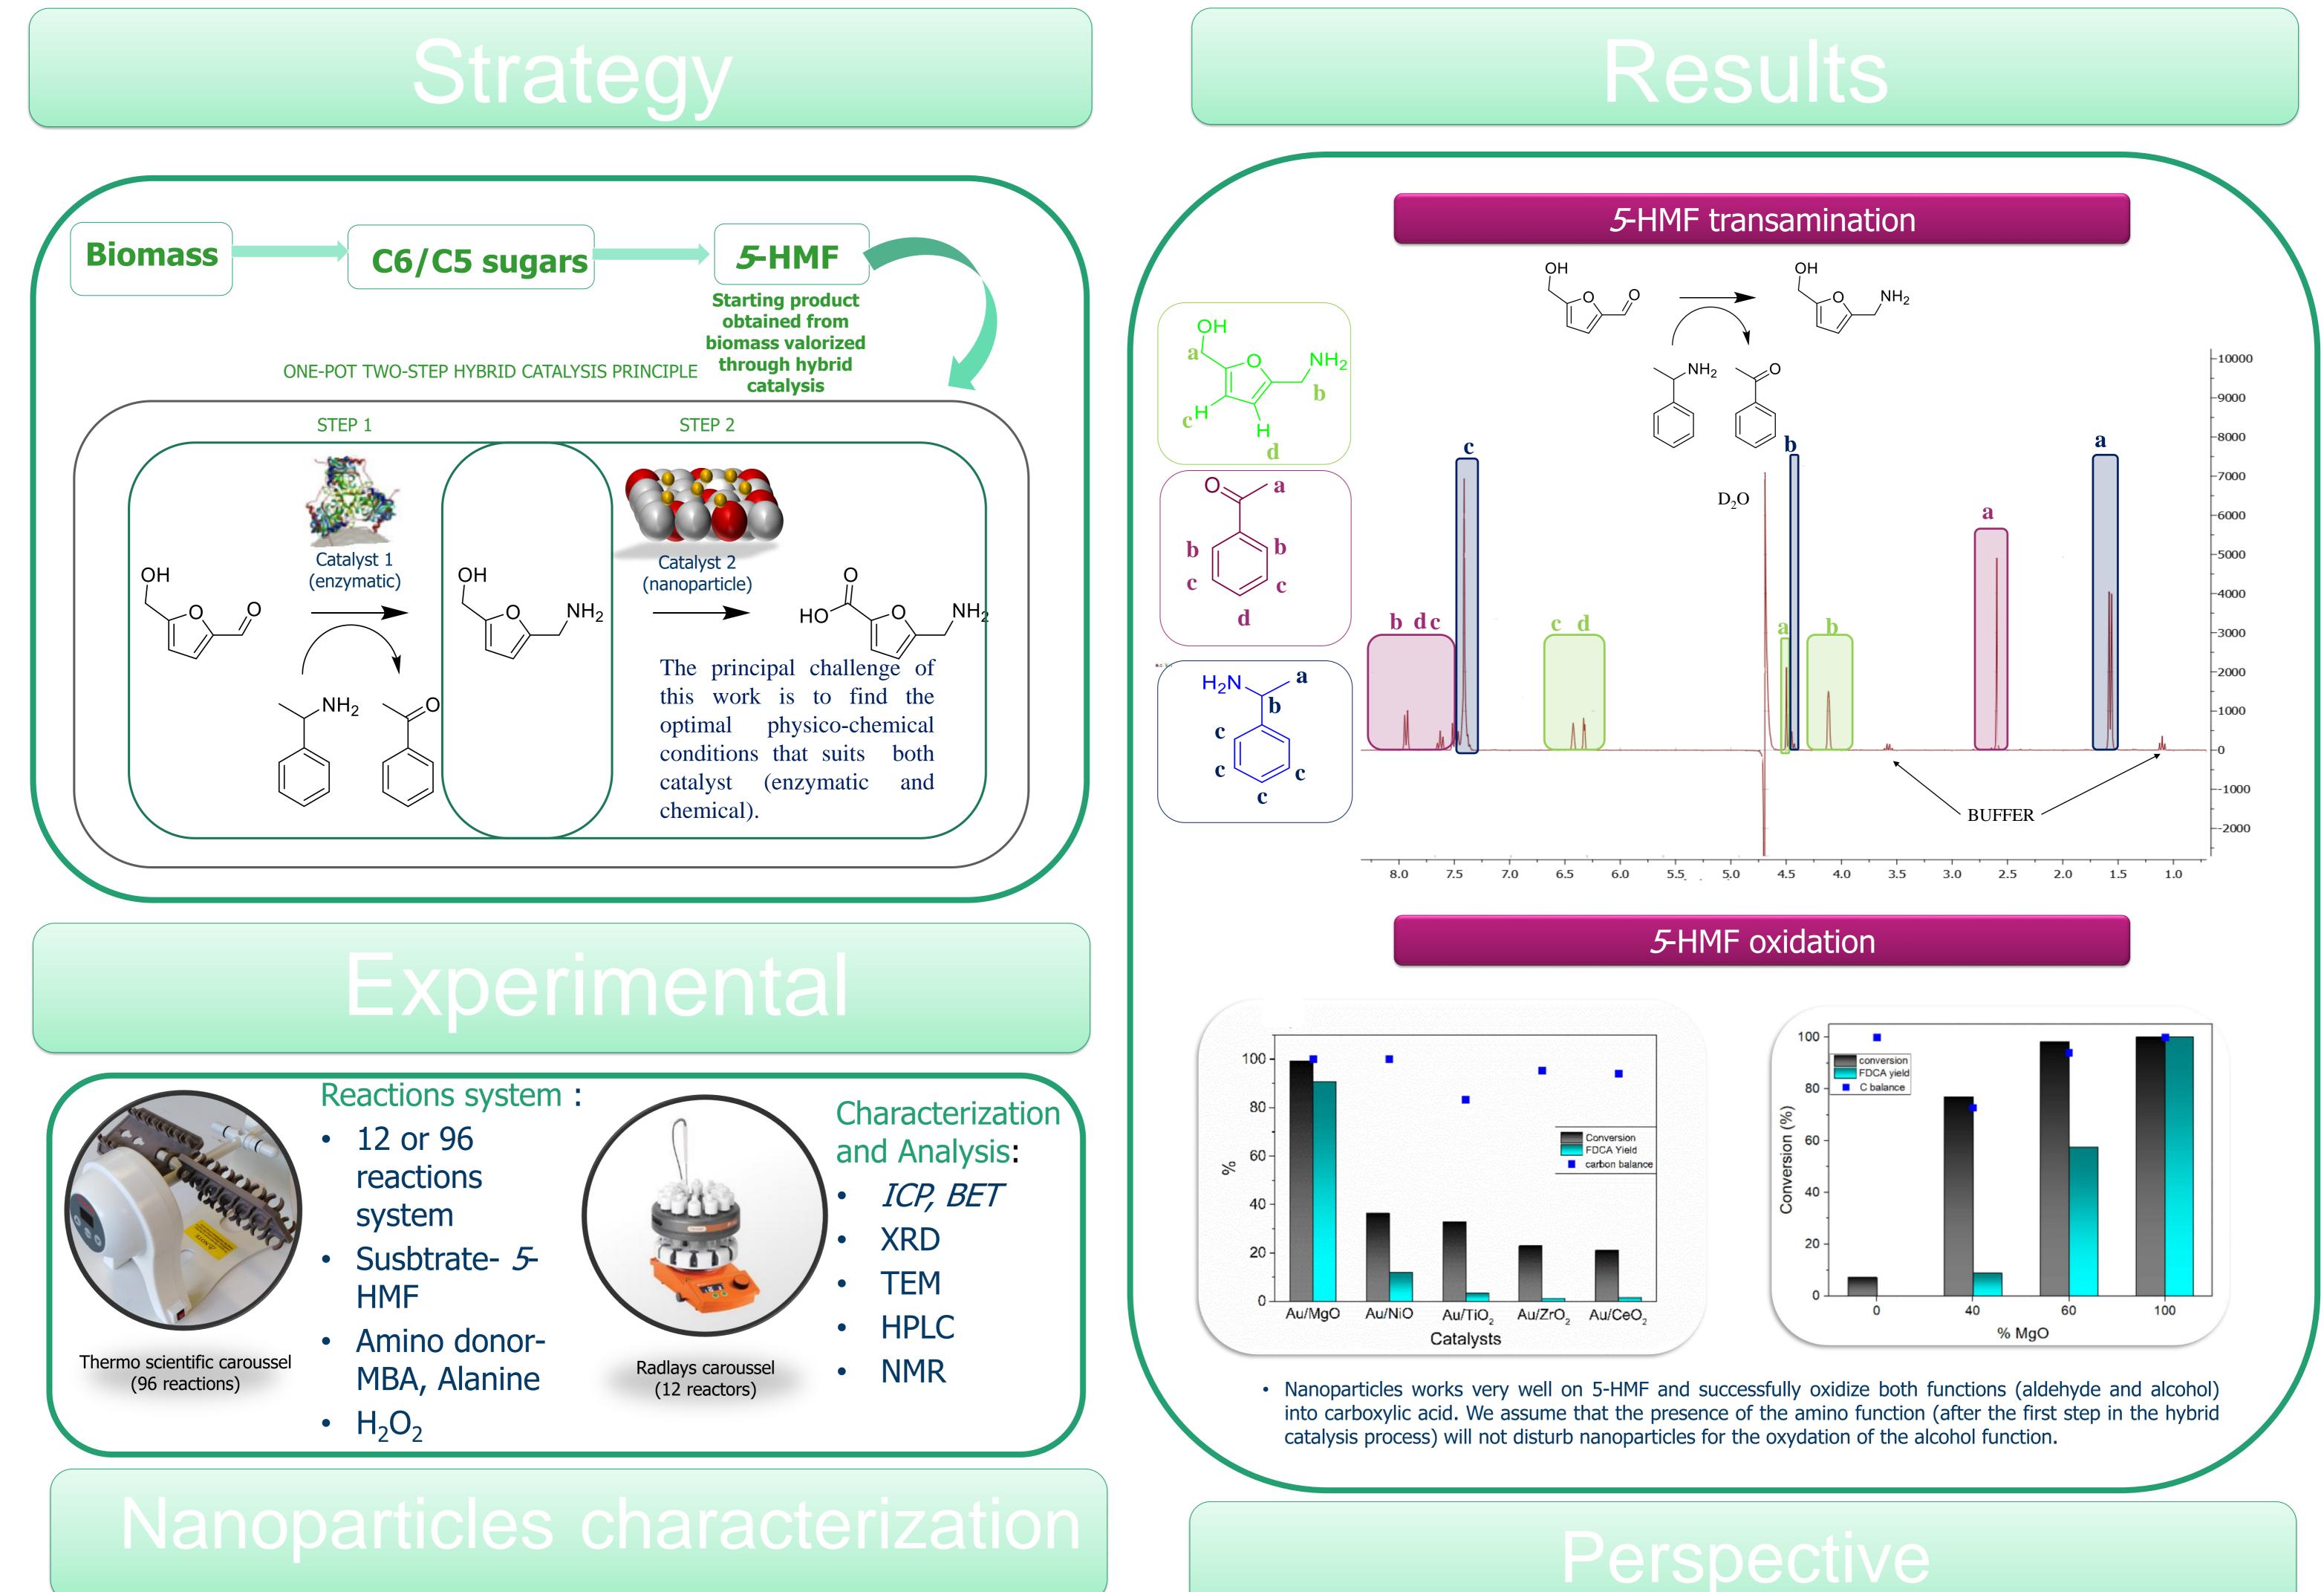

The Au-based catalysts were prepared using the two-step sol immobilization method

where gold nanoparticles of similar size are first prepared and then immobilized in MgO through a reproducible method. PVA-stabilized Au NPs of average 3 nm, as determined by TEM (Figure 1A), had their size preserved after immobilization on different supports (Figure 1B). The Au NPs deposited on the supports were monodispersed with average size 3.6 nm \pm 0.8 nm and no significant agglomeration of gold nanoparticles was detected

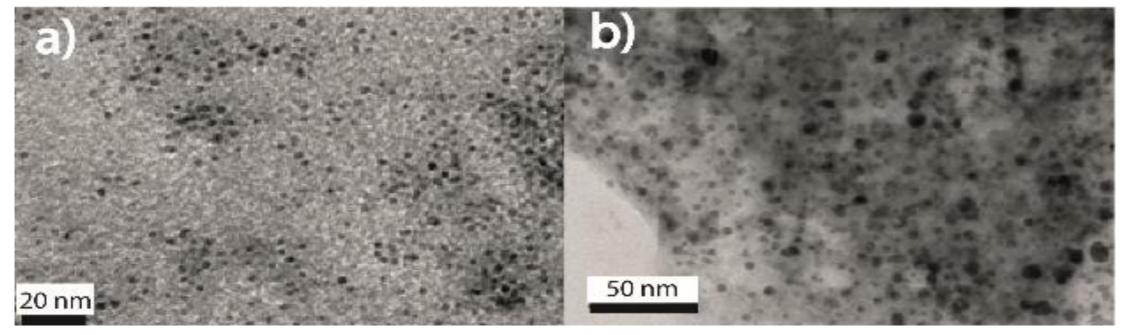


Figure 1. TEM images of the (a) unsupported gold NPs, (b) Au/MgO.

- The study confirmed the advantages of Au-based catalysts for the selective oxidation of HMF under the conditions used for the enzymatic part of hybrid catalysis .
- The enzymatic study confirmed that the transaminase we use is capable of transamination on the 5-HMF at different pH (free end immobilised).
- The aim of this project is to perform this reaction in "one-pot one-step" with the transamination of the aldehyde function of 5-HMF and the oxidation of alcohol function into a carboxylic acid in order to obtain a recoverable product from the lignocellulosic biomass.
- This work could involve on the research of a new thermostable enzyme.
- It could also be based on the research of new chemical catalyst which are not disturbed by the presence of an amino function.

Isikgor FH, Becer CR. Lignocellulosic biomass: a sustainable platform for the production of bio-based chemicals and polymers. Polym Chem. 2015;6(25):4497-559.

Dumeignil F, Guehl M, Gimbernat A, Capron M, Ferreira NL, Froidevaux R, et al. From sequential chemoenzymatic synthesis to integrated hybrid catalysis: taking the best of both worlds to open up the scope of possibilities for a sustainable future. Catal Sci Technol. 2018;8(22):5708-34.





